


[Dashboard](#)
[Hardware](#)
[Mono Laser](#)
[Lexmark M5155](#)



Lexmark M5155

Mono Laser


Part # : 40G0720

[Customer Sales](#)



Superior Performance.


The Lexmark M5155 network-ready laser printer includes a 4.3-inch color touch-screen, internal 2-sided printing, 800 MHz processor, 512MB of memory, 650-sheet standard input and a front USB Direct print port.

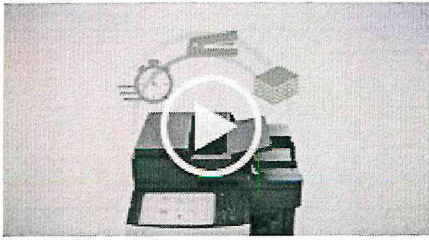

Digital Assets


[Download Brochure](#)

Features

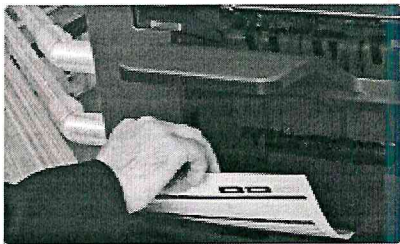

Faster Processing

Improve your print speeds by taking advantage of up to 2.5 GB of upgradable memory, an 800 MHz dual-core processor and Gigabit Ethernet.

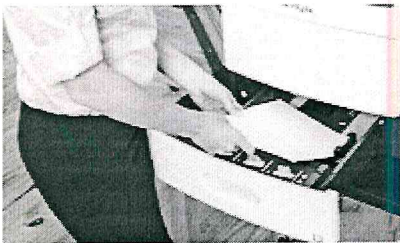


Reliable High Performance

Easily print up to 50,000 pages per month, plus enjoy fewer maintenance hassles, thanks to our state-of-the-art paper handling.

4,400

Keep Jobs Moving

With a maximum input capacity of up to 4,400 sheets and a high yield toner cartridge, you won't have to add paper or change cartridges as often.

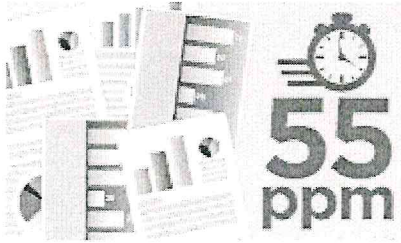

Spend Less Time Waiting

Print up to 55 pages per minute, and produce your first page in as little as 4.8 seconds.



Finishing That Adds Polish

Produce projects like a pro with optional automated offsetting, stapling and hole punching.

Warranty Information



Partner Benefits

Product Configuration Guide
Document
1.29 MB
[Download](#)

Quick Reference Guide
Document
3.67 MB
[Download](#)

Spec Sheet
Document
0.72 MB
[Download](#)

M51 Series Product Photography
Archive
9.24 MB
[Download](#)

Demo Video
Video
[Download](#)

Specs**In the Box**

Lexmark M5155 laser printer
Up to 10,000 pages* starter return program toner cartridge
Return program imaging unit
Software and documentation CD
Setup guide or sheet (network and local attachment)
Power cord(s)
Statement of limited warranty / guarantee
Stability sheet and safety sheet or booklet
Lexmark Cartridge Collection Program information

*Average standard page yield value declared in accordance with ISO/IEC 19752.

Ethernet, USB or parallel cable not included.

Box contents may vary by country and/or reseller. Subject to change without notice.

Tech Specs**Part Number**

40G0720

Print Technology

Monochrome Laser

Workgroup Size

Large Workgroup

Touch Screen Display

Yes

Display

Lexmark e-Task 4.3-inch (10.9 cm) color touch screen

Print Speed (Letter, Black)

Up to 55 ppm⁶

Print Speed (Letter, Black) Duplex

Up to 33 spm⁶

Time to First Page (Black)

As fast as 4.8 seconds

Duplex (2-sided) Printing

Integrated Duplex

Print Resolution, Black

1200 Image Quality

1200 x 1200 dpi

2400 Image Quality

600 x 600 dpi

Processor

Dual Core, 800 MHz

Memory, Standard

512 MB

Memory, Maximum

2560 MB

Hard Disk

Option available

Apple Operating Systems Supported

Apple OS X (10.5, 10.6, 10.7, 10.8, 10.9, 10.10)

Citrix MetaFrame

Microsoft Windows Server 2003 running Terminal Services with Citrix Presentation Server 3.0, 4.0, 4.5

Microsoft Windows Server 2003 x64 running Terminal Services with Citrix Presentation Server 4.0 x64, 4.5 x64

Microsoft Windows Server 2003 and 2003 X64 Edition with Citrix XenApp 5.0

Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0

Microsoft Windows Server 2008 R2 with Citrix XenApp 6.0, 6.5

Linux Operating Systems Supported

SUSE Linux Enterprise Server 10, 11

SUSE Linux Enterprise Desktop 10, 11

Red Flag Linux Desktop 6.0

Linpus Linux Desktop 9.6

Debian GNU/Linux 5.0, 6.0

Red Hat Enterprise Linux WS 4.0, 5.0, 6.0

Ubuntu 11.04, 11.10, 12.04, 12.10

openSUSE 11.3, 11.4, 12.1, 12.2

PCLinuxOS 2011

Mint 9, 10, 11, 12, 13

Fedora 14, 15, 16, 17

Microsoft Windows Operating Systems Supported

Windows XP

Windows Server 2003

Windows XP x64

Windows Server 2003 x64

Windows Vista

Windows Vista x64

Windows Server 2008

Windows Server 2008 x64

Windows 7

Windows 7 x64

Windows Server 2008 R2

Windows 8

Windows 8 x64

Windows Server 2012

Windows 8.1

Windows 8.1 x64

Windows Server 2012 R2

Windows RT

Windows RT 8.1

Novell Operating Systems Supported

Novell NetWare 6.5 Open Enterprise Server

Novell NetWare 5.1(SP 6+), 6.0(SP 3+) with Novell Distributed Print Services (NDPS)

Novell Open Enterprise Server on SUSE Linux Enterprise Server

UNIX Operating Systems Supported

HP-UX 11.11, 11.23, 11.31

Sun Solaris SPARC 9, 10, 11

Sun Solaris x86 10, 11

IBM AIX 5.3, 6.1, 7.1

Included Paper Handling

550-Sheet Input
100-Sheet Multipurpose Feeder
550-Sheet Output Bin
Integrated Duplex

Optional Paper Handling

250-Sheet Tray
550-Sheet Tray
2100-Sheet Tray
250-Sheet Lockable Tray
550-Sheet Lockable Tray
4-Bin Mailbox
Staple Finisher
Staple Punch Finisher
High Capacity Output Expander
Output Expander

Paper Input Capacity, Standard

Up to 650 pages 20 lb or 75 gsm bond

Paper Input Capacity, Maximum

Up to 4400 pages 20 lb or 75 gsm bond

Paper Output Capacity, Standard

Up to 550 pages 20 lb or 75 gsm bond

Paper Output Capacity, Maximum

Up to 2550 pages 20 lb or 75 gsm bond

Paper Weight Range Supported - Standard Tray (lb.)

16 - 47 lb.

Integrated Tray Card Stock Upper limit (grain short)

Cover - 176 gsm (65 lb)
Index Bristol - 199 gsm (110 lb)
Tag - 203 gsm (125 lb)

Finishing Option

Yes

Number of Paper Inputs, Standard

2

Number of Paper Inputs, Maximum

6

Media Types Supported

Card Stock

Dual Web Labels
Envelopes
Integrated Labels
Paper Labels
Plain Paper
Transparencies
Refer to the Card Stock & Label Guide.

Media Sizes Supported

10 Envelope
7 3/4 Envelope
9 Envelope
A4
A5
B5 Envelope
C5 Envelope
DL Envelope
Executive
Folio
JIS-B5
Legal
Letter
Statement
Universal
Oficio
A6

Standard Ports

One Internal Card Slot
USB 2.0 Specification Hi-Speed Certified (Type B)
Gigabit Ethernet (10/100/1000)
Front USB 2.0 Specification Hi-Speed Certified port (Type A)
Rear USB 2.0 Specification Hi-Speed Certified Port (Type A)

Optional Local Ports

Internal RS-232C serial
Internal 1284-B Bidirectional Parallel

Optional Network Ports

Internal MarkNet N8350 802.11b/g/n Wireless

Direct USB

Yes

Ethernet Network

Yes

Network Protocol Support

TCP/IP IPv4
AppleTalk™
TCP/IP IPv6
TCP
UDP

Network Printing Methods

LPR/LPD
Direct IP (Port 9100)
Enhanced IP (Port 9400)
FTP, TFTP
ThinPrint .print integration
Telnet
IPP 1.0, 1.1, 2.0 (Internet Printing Protocol)

Network Management Protocols1

HTTP
HTTPs (SSL/TLS)
SNMPv1, SNMPv2c
SNMPv3
WINS
IGMP
BOOTP, RARP
APIPA (AutoIP)
DHCP
ICMP
DNS
Bonjour
DDNS
mDNS
ARP
NTP
Telnet
Finger

Network Security

SNMPv3
802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS
IPSec

Printable Area

0.167 inches of the top, bottom, right and left edges (within)

Printer Languages (Standard)

PCL 5e Emulation
PCL 6 Emulation
Personal Printer Data Stream (PPDS)

PostScript 3 Emulation

Direct Image

Microsoft XPS (XML Paper Specification)

AirPrint™

PDF 1.7 emulation

Fonts and Symbol Sets

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide

158 scalable PostScript fonts

2 PCL bitmap fonts

39 scalable PPDS fonts

5 PPDS bitmap fonts

84 scalable PCL fonts

OCR-A, OCR-B scalable PCL 5e fonts

For more information, refer to the Technical Reference.

Laser Cartridge Yields (up to)5

35,000-page Extra High Yield Cartridge

Imaging Unit Estimated Yield

Up to 100000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage⁴

Cartridge(s) Shipping with Product

10,000-page Starter Return Program Toner Cartridge

Packaged Size (in. - H x W x D)

22.2 x 24.2 x 21.1 in.

Packaged Weight (lb.)

60.6 lb.

Size (in. - H x W x D)

16.5 x 16.7 x 20.1 in.

Weight (lb.)

52.3 lb.

Noise Level, Idle

33 dBA

Noise Level (Print), Operating

56 dBA

Duplex Print Noise Level, Operating

55 dBA

ENERGY STAR

Yes

Average Power (Hibernate Mode)

0.5 watts

Average Power (Sleep Mode)

3.3 watts

Average Power (Ready Mode)

55 watts

Average Power (Printing)

700 watts

ENERGY STAR Typical Electricity Consumption (TEC)

3.7 kilowatt-hours per week

Limited Warranty - See Statement of Limited Warranty

1-Year Parts Only

Product Certifications

ENERGY STAR, Blue Angel RAL-UZ-171, ICES-003 Class B, BSMI Class B, VCCI Class B, US FDA, UL 60950-1, FCC Class B, cUL CAN/CSA-C22.2 60950-1, NOM, CB EN/IEC 60950-1, CB EN/IEC 60825-1, CE DoC (EN 62301 Class B, EN 62311, CE EN/IEC 60950-1, CE EN/IEC 60825-1, EN 61000-3, EN 55022 Class B, EuP, EN 55024, UL), EFTA (CE), KCC, CCC, CECP, CEL, C-tick DoC, UL-AR, KC mark, UL GS mark, EC 1275, MET-I, ISO 532B, ECMA-370, TED, GOST-R, SII, TER

Maximum Monthly Duty Cycle

Up to 250000 pages per month³

Recommended Monthly Page Volume

3000 - 50000 pages²

Specified Operating Environment

Temperature: 16 to 32°C (60 to 90°F)

Humidity: 8 to 80% Relative Humidity

Altitude: 0 - 2896 Meters (9,500 Feet)

License/Agreement Terms

Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details.

Country of Origin

China (PR)

UNSPSC Code

43212105

Harmonized Tariff Code

8443.32.1010

¹This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)

²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

⁴Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity.

⁵Average yield based on approximately 5% print coverage.

⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

Ink & Toner

Return Cartridges

Lexmark Return Program Cartridges are sold at a discount versus the prices of Regular Cartridges in exchange for the customer's agreement to use the cartridge only once and return it only to Lexmark for remanufacturing or recycling.

Name	Page Yield
<u>Toner Cartridge</u> 24B6015	35,000

Other Supplies

Name	Page Yield
<u>Staple Cartridges (3 pack)</u> 25A0013	15,000
<u>Imaging Unit</u> 24B6025	100,000

Non-Return Cartridges

Regular Cartridges are sold at regular prices. These cartridges are also recyclable at no cost through "Lexmark Cartridge Collection Program."

Name Page Yield

Advanced Toner Science

Lexmark Corporate Cartridges combine the quality innovation of Unison toner with robust and durable design to deliver long-term reliability. They deliver optimal performance and superior print quality whilst boasting a significantly smaller carbon footprint than Lexmark's largest competitor.

Learn More

Options

Paper Handling

40G0801

250-Sheet Tray

40G0803

550-Sheet Tray

40G0852

4-Bin Mailbox

40G0851

Output Expander

40G0853

High Capacity Output Expander

40G0850

Staple Finisher

40G0849

Staple, Hole Punch Finisher

40G0802

550-Sheet Tray

40G0804

2100-Sheet Tray

40G0800

250-Sheet Tray

40G0820

250-Sheet Lockable Tray

40G0822

550-Sheet Lockable Tray

40G0854

4.3 in. (11 cm) Spacer

Toner Cartridges

25A0013

Staple Cartridges (3 pack)

24B6015

Toner Cartridge

24B6025

Imaging Unit

Connectivity

27X0142

Lexmark MarkNet™ N8230 Fiber Ethernet Print Server

1021231

Parallel Cable (10-foot)

1021294

USB Cable (2-meter)

14F0100

RS-232C Serial Interface Card

14F0000

Parallel 1284-B Interface Card

27X0225

MarkNet N8350 802.11b/g/n Wireless Print Server

27X0310

MarkNet N8350 Wireless Print Server plus NFC

SPD0001

Surge Protective Device, 110-120V

User Replaceable Parts

40X8420

Return Program Fuser Maintenance kit, 110-120V Type 00, Letter

40X8424

Return Program Fuser Maintenance kit, 220-240V Type 04, Letter

40X7706

Roller Maintenance Kit

40X7743

Return Program Fuser, 110-120V Type 00, Letter

40X7734

Return Program Fuser, 220-240V Type 04, Letter

40X8425

Fuser Maintenance kit, 110-120V, Type 05, Letter

40X8429

Fuser Maintenance kit, 220-240V, Type 09, Letter

40X8016

Fuser, 110-120V Type 05, Letter

40X8020

Fuser, 220-240V, Type 09, Letter

40X7582

Transfer Roller

40X7593

Media Pick Roller

40X7713

Separation Roller

Service Parts

40X7600

Multipurpose feeder pick roller

Memory Options

27X0200

320+ GB Hard Disk

57X9016

1024MBx32 DDR3-DRAM

57X9012

2048MBx32 DDR3-DRAM

57X9101

256MB Flash Memory Card

57X9110

Traditional Chinese Font Card

57X9112

Simplified Chinese Font Card

57X9114

Korean Font Card

57X9115

Japanese Font Card

57X0070

Removable Hard Disk Enclosure Kit

Application Solutions

57X0300

Contact Authentication Device

57X0301

Contactless Authentication Device

57X0310

Contact Authentication Device with Software

40G0831

MS810de Card for IPDS

40G0830

MS810de Forms and Bar Code Card

40G0837

MS810de Card for PRESCRIBE Emulation

Embedded Apps

82S0218

Background and Idle Screen

82S0139

Device Quotas

82S0194

Downtime Reports

82S0231

Showroom

82S0143

QR Code Generator

82S0134

Google Cloud Print

82S0145

Accessibility Speech

82S0250INC

Forms and Favorites

CLanguageINC

Change Language

82S0228INC

Eco Settings

CBackgroundINC

Change Background

82S0247INC

Customer Support

82S0375

Secure Held Print Jobs

82S0538

Google Drive Print

82S0830

Card Authentication

82S0799INC

Address Book

Furniture

40C2300

Adjustable Stand

40G0855

Caster Base

3073173


Swivel Cabinet

Installation Service

Extended Warranties

Apps

Included with Hardware



Forms and Favorites

Keep frequently used forms and documents easy to access. Businesses save money by eliminating preprinted forms.




Change Language

The Change Language App allows you to easily change the display language used on the operator panel menus from the home screen.



Eco Settings

Change device settings to enhance environmental savings: Eco-Mode, two-sided printing, time to standby mode, time to power saver mode, screen brightness and quiet mode.



Change Background

Allows a user to enable a custom background on the e-Task display.



Customer Support

Send email alerts to help desks or service providers to request support. Pertinent information about the device can be included in the automated email.



Address Book

Manage the device's internally stored user data, contacts and scan destinations (if supporting applications are installed) from the e-Task touchscreen or the embedded web server.

[Support](#)